

SHIPTRON

Marine communication Specialists

USB-isolator Galvanisch gescheiden USB 1.0 + 2.0 stekker

SHIPTRON presenteert :


De kleinste USB 2.0 isolator op de markt


De USB-isolator beschermt de computer tegen statische spanningen en aardlussen, ook de aangesloten USB toestellen worden extra beschermd.

- Het koppelen van USB-com kabels wordt hier door 100% veilig.
- NMEA-183 data overdracht wordt beter en heeft minder kans op storingen.
- Werkt 2 kanten op, bi-directioneel.
- Geschikt voor USB 1.0 en 2.0
- Past eenvoudig tussen de bestaande USB stekkers.
- Géén software of drivers nodig!, werkt voor ELK computer systeem met USB.
- Geschikt voor Win-XP, VISTA, W-7, Win2000, WinNT W-embedded, Linux, MAC
- Géén externe voeding nodig.
- Óók geschikt tegen storing vanaf SSB zend apparatuur.

Technische Specificaties:

- USB 2.0 fullspeed tot 12MB/s
- Galvanische Isolatie tot 1000 volt
- Geschikt tot 400 mA bij 5 volt
- Temperatuur bereik; -40 tot +50 °C
- Relatieve Vochtigheid; 25-75% RV.
- Afmetingen; 50 x 25 x 12,5 mm
- Stekkers; USB-A stekker en contra
- Bescherming: IP-40
- Gewicht: 17 gram
- MBTF: 25 jaar

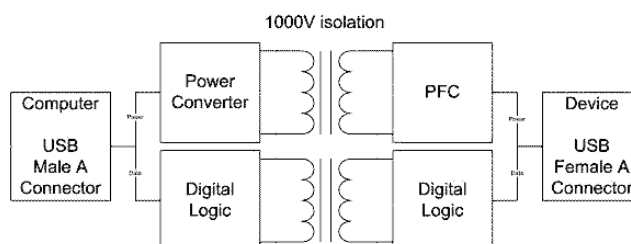

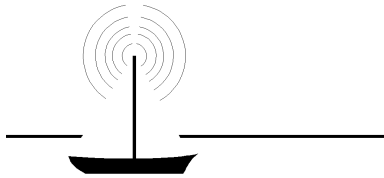

SHIPTRON

Marine communication Specialists

USB-isolator Galvanic Isolated USB 1.0 + 2.0 Adapter

SHIPTRON presents to you:

The Smallest USB 2.0 Isolator at the market!

The USB-isolator protects the computer and external equipment against static discharges and groundloops between other equipment.

- The USB I/O becomes 100% safe
- NMEA-183 data transfer becomes less sensitive to interference
- Bi-directional data transfer.
- Suitable for USB 1.0 and 2.0
- Fits easily between existing connectors.
- No extra software or drivers required, usable at every USB port.
- Suitable Win-XP, VISTA, W-7, Win2000, WinNT, W-embedded, Linux, MAC
- No external power supply needed.
- Protects against strange RF-effects from SSB transmitters.

Technical Specifications:

- USB 2.0 fullspeed up to 12MB/s.
- Galvanic Isolated till 1000 Volts.
- Suited up to 400mA at 5 Volts.
- Temperature range: -40 to +50 °C
- Humidity: 25 to 75% RH
- Compliance: FCC, CE
- Dimensions: 50 x 25 x 12,5 mm
- Weight: 17 Grams
- Protection: IP-40
- MTBF: 25 years
- Connectors: USB-A, Male and Female

